

EXECUTIVE SUMMARY

GORMAN-RUPP is pleased to announce the expansion of our Ultra V Series® to include an engine-driven configuration of these popular pumps. These new units offer substantially higher pressure, flow and efficiency than other comparable pumps. Time-saving maintenance features on these models include shimless adjusting, atmospheric vents and self-cleaning wearplates.

Ultra V Series engine-driven models are available in 3", 4" and 6" sizes. They can handle flows of 2,050 gpm and maximum head of 175 feet.

These pumps are powered either by an air-cooled diesel engine or a liquid-cooled diesel engine all of which meet the latest EPA Tier emission standards.




SHOWN WITH
OPTIONAL WHEEL KIT

PUMP MODEL FEATURES

MODEL	V3A	V4A	V6A
SIZE	4" x 3" 101.6 mm x 76.2 mm	6" x 4" 152.4 mm x 101.6 mm	8" x 6" 203.2 mm x 152.4 mm
MAXIMUM FLOW	725 gpm 45.7 lps	1100 gpm 70.3 lps	2050 gpm 129.2 lps
MAXIMUM HEAD	140 Feet 42.7 m	150 Feet 46.9 m	175 Feet 53.3 m
MAXIMUM SOLIDS	2.5 Inches 63.5 mm	3 Inches 76.2 mm	3 Inches 76.2 mm
GRAY IRON HOUSING	●	●	●
DUCTILE IRON IMPELLER (Other Materials Available)	●	●	●
SELF-CLEANING WEAR PLATE	●	●	●
SEAL (Cartridge Style Oil-Lubricated, Double-Floating, Self-Aligning)	●	●	●
STAINLESS STEEL PUMP SHAFT	●	●	●
FLANGES (Suction/Discharge)	NPT/○	NPT/○	○/○
DEUTZ DIESEL (Air Cooled)	A	A	A
JOHN DEERE DIESEL (Liquid Cooled)	A	A	A
AUTOSTART w/ FLOAT	●	●	●
AUTOSTART w/ EPS & TRANSDUCER	○	○	○
SUCTION STRAINER	●	●	●
BATTERY	○	○	○
HIGH-SPEED WHEEL KIT	○	○	○
DOT TRAILER w/ BRAKES & LIGHTING KIT	○	○	○

● Standard A Available ○ Optional

PERFORMANCE DATA

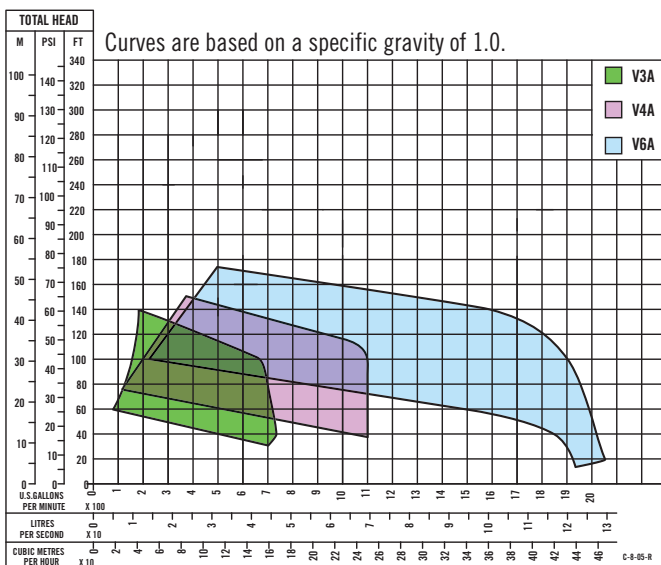

ORDERING INFORMATION

Consult factory for other product availability. For pricing on all Gorman-Rupp parts and pumps, please visit G-R DNET at <http://grdnet.gormanrupp.com> or by contacting any member of our Customer Service team at:

Phone: 419.755.1011

Fax: 419.755.1251

GRsales@gormanrupp.com